

let's talk!

# DC-DC Converter DCDC300-24-24

For Rail and Industrial Applications

## Specification

### General

Electrical safety	DIN EN 60950, VDE 0805 overload protected and permanent short-circuit proof
-------------------	--



Picture may differ from actual device

### Electrical Data

#### Input

Input voltage nominal	$U_N = 24 \text{ V}_{\text{DC}}$
Voltage range	+/- 20% (18-32 V <sub>DC</sub> )

#### Output

Output voltage	24 V <sub>DC</sub> , isolated, "floating"
Voltage tolerance	< +/- 2%
Setting range	22 – 26 V <sub>DC</sub>
Ripple	<100 mV <sub>ss</sub> (50 MHz 50 Ohm)
Start-up delay	3 seconds
Output current	I <sub>OUT</sub> = 0 – 12,5 A
Current limitation	I <sub>S</sub> = 1,05 x I <sub>OUT max.</sub>
Overload characteristic	permanent short-circuit proof
Output features	parallel operation for output power upgrade redundant operation possible
Output power	300W
Efficiency	>85% at U <sub>N</sub>

#### Signal

Alarm contact	power good relais
Optical signals	output voltage U <sub>OUT</sub> o.k. LEDs (green) for U <sub>IN</sub> ; U <sub>OUT</sub>

#### Connection Characteristics

Connector	H15 DIN 61612; rear side
Pin assignment	refer to table below

#### Warranty Time

24 months

#### Order Code


DCDC300-24-24

#### Options

-1	formal coating, additional glued components
----	---

### Ambient Characteristic

Ambient temperature	-40 to +60 °C
Relative humidity	max. 95%, not condensing
Cooling	forced cooling, internal fan, temperature controlled
Derating	from ambient temperature >50 °C, 2,5%/1 °C

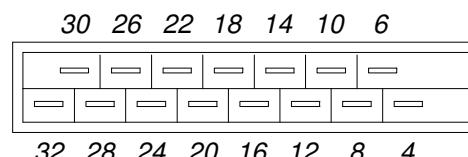

### Protection

Input	20A fuse
Output	overvoltage protection = U <sub>OUT</sub> < 30V

### EMC

Emission	DIN EN 55022 B
Immunity	DIN EN 55024, industrial areas

### Insulation

Input to ground	500V
Output to ground	500V
Input to output	500V

### Mechanical Data

Dimension	19"-alu cassette, 3U, 14 TE
Weight	approx. 1kg
Protection	IP 20

Pin	Function	Abbreviation
4	Output voltage positive	+ U <sub>OUT</sub>
6	Output voltage positive	+ U <sub>OUT</sub>
8	Output voltage reference	0V U <sub>OUT</sub>
10	Output voltage reference	0V U <sub>OUT</sub>
12	Load share	+ LS
14	Load share reference	0V LS
16	Not connected	n.c.
18	Signal, common	COM
20	Signal, normal closed	NC
22	Signal, normal open	NO
24	Protective earth	PE
26	Input voltage positive	+ U <sub>IN</sub>
28	Input voltage positive	+ U <sub>IN</sub>
30	Input voltage reference	0V U <sub>IN</sub>
32	Input voltage reference	0V U <sub>IN</sub>