



# 15W Single Output Switching Power Supply

# RS-15 series



### ■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- No load power consumption<0.5W
- All using 105°C long life electrolytic capacitors
- Withstand 300VAC surge input for 5 second
- High operating temperature up to 70°C
- Withstand 5G vibration test
- High efficiency, long life and high reliability
- 3 years warranty

User's Manual



### ■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



IS13252



AS/NZS62368-1



UL62368-1



GB4943.1



BS EN/EN62368-1



R3100 RoHS



TPTC004



IEC62368-1



CE



UKCA

### SPECIFICATION

| MODEL                 | RS-15-3.3  | RS-15-5  | RS-15-12     | RS-15-15     | RS-15-24       | RS-15-48     |              |
|-----------------------|--|--|--------------|--------------|----------------|--------------|--------------|
| OUTPUT                | DC VOLTAGE   | 3.3V   | 5V           | 12V          | 15V            | 24V          | 48V          |
|                       | RATED CURRENT  | 3A   | 3A           | 1.3A         | 1A             | 0.625A       | 0.313A       |
|                       | CURRENT RANGE  | 0 ~ 3A   | 0 ~ 3A       | 0 ~ 1.3A     | 0 ~ 1A         | 0 ~ 0.625A   | 0 ~ 0.313A   |
|                       | RATED POWER  | 9.9W   | 15W          | 15.6W        | 15W            | 15W          | 15.024W      |
|                       | RIPPLE & NOISE (max.) Note.2   | 80mVp-p  | 80mVp-p      | 120mVp-p     | 120mVp-p       | 200mVp-p     | 200mVp-p     |
|                       | VOLTAGE ADJ. RANGE   | 2.9 ~ 3.6V   | 4.75 ~ 5.5V  | 10.8 ~ 13.2V | 13.5 ~ 16.5V   | 22 ~ 27.6V   | 43.2 ~ 52.8V |
|                       | VOLTAGE TOLERANCE Note.3   | ±3.0%  | ±2.0%        | ±1.0%        | ±1.0%          | ±1.0%        | ±1.0%        |
|                       | LINE REGULATION Note.4   | ±0.5%  | ±0.5%        | ±0.5%        | ±0.5%          | ±0.5%        | ±0.5%        |
|                       | LOAD REGULATION Note.5   | ±2.0%  | ±1.5%        | ±0.5%        | ±0.5%          | ±0.5%        | ±0.5%        |
|                       | SETUP, RISE TIME   | 1000ms, 30ms/230VAC 1000ms, 30ms/115VAC at full load   |              |              |                |              |              |
| HOLD UP TIME (Typ.)   | 70ms/230VAC 12ms/115VAC at full load   |  |              |              |                |              |              |
| INPUT                 | VOLTAGE RANGE  | 85 ~ 264VAC 120 ~ 370VDC   |              |              |                |              |              |
|                       | FREQUENCY RANGE  | 47 ~ 63Hz  |              |              |                |              |              |
|                       | EFFICIENCY (Typ.)  | 72%  | 77%          | 81%          | 81%            | 82%          | 82%          |
|                       | AC CURRENT (Typ.)  | 0.35A/115VAC 0.25A/230VAC  |              |              |                |              |              |
|                       | INRUSH CURRENT (Typ.)  | COLD START 65A / 230VAC  |              |              |                |              |              |
| LEAKAGE CURRENT       | <2mA / 240VAC  |  |              |              |                |              |              |
| PROTECTION            | OVERLOAD   | Above 105% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed                          |              |              |                |              |              |
|                       | OVER VOLTAGE   | 3.8 ~ 4.45V  | 5.75 ~ 6.75V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 28.4 ~ 32.4V | 55.2 ~ 64.8V |
|                       | OVER TEMPERATURE   | Shut down o/p voltage, recovers automatically after temperature goes down  |              |              |                |              |              |
| ENVIRONMENT           | WORKING TEMP.  | -20 ~ +70°C (Refer to "Derating Curve")  |              |              |                |              |              |
|                       | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing   |              |              |                |              |              |
|                       | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C, 10 ~ 95% RH   |              |              |                |              |              |
|                       | TEMP. COEFFICIENT  | ±0.03%/°C (0 ~ 50°C)   |              |              |                |              |              |
|                       | VIBRATION  | 10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes  |              |              |                |              |              |
| SAFETY & EMC (Note 6) | SAFETY STANDARDS   | UL62368-1, TUV BS EN/EN62368-1, AS/NZS 62368.1, EAC TP TC 004, CCC GB4943.1, BSMI CNS14336-1, BIS IS13252(Part1):2010/IEC 60950-1: 2005 approved |              |              |                |              |              |
|                       | WITHSTAND VOLTAGE  | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC  |              |              |                |              |              |
|                       | ISOLATION RESISTANCE   | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH  |              |              |                |              |              |
|                       | EMC EMISSION   | Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3,GB9254 class B,GB17625.1, EAC TP TC 020, CNS13438 Class B                    |              |              |                |              |              |
|                       | EMC IMMUNITY   | Compliance to BS EN/EN61000-4-2, 3, 4, 5, 6, 8,11, BS EN/EN55035, BS EN/EN61000-6-1, light industry level, EAC TP TC 020                         |              |              |                |              |              |
| OTHERS                | MTBF   | 4914.9K hrs min. Telcordia SR-332 (Bellcore) ; 1608.9K hrs min. MIL-HDBK-217F (25°C)   |              |              |                |              |              |
|                       | DIMENSION  | 62.5*51*28mm (L*W*H)   |              |              |                |              |              |
|                       | PACKING  | 0.13Kg; 108pcs/15Kg/0.8CUFT  |              |              |                |              |              |
| NOTE                  | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. Line regulation is measured from low line to high line at rated load.</li> <li>5. Load regulation is measured from 0% to 100% rated load.</li> <li>6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 230mm*230mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a>)</li> <li>7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> </ol> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p> |  |              |              |                |              |              |




# 15W Single Output Switching Power Supply

# RS-15 series


## Mechanical Specification

Case No.971A Unit:mm

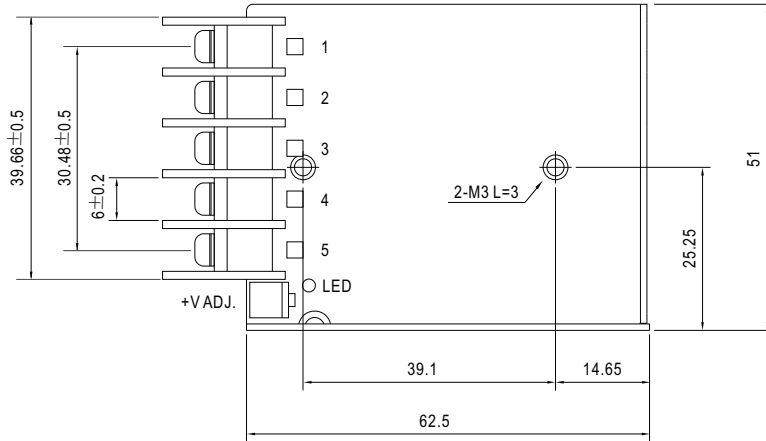


### Terminal Pin No. Assignment


| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4       | DC OUTPUT -V |
| 2       | AC/N       | 5       | DC OUTPUT +V |
| 3       | FG $\perp$ |         |              |

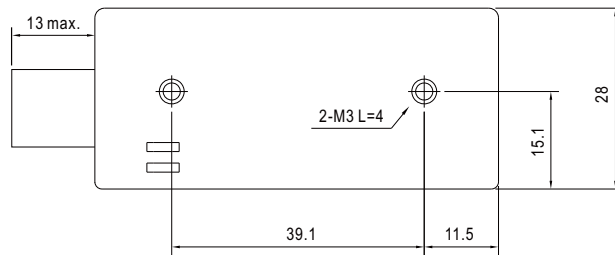

## Block Diagram

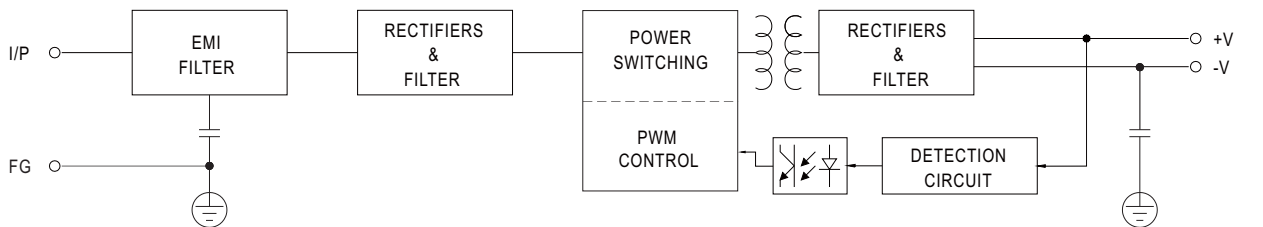

## Derating Curve

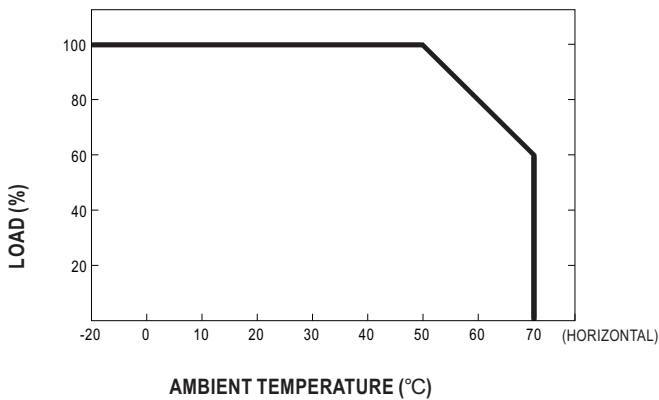

## Output Derating VS Input Voltage

